

Brand Colorimeter Extraordinarily Accurate Spectrophotometer ST50



3nh Global



GUANGDONG THREENH TECHNOLOGY CO., LTD.



Spectrophotometers



Colorimeters



Haze Meters



Gloss Meters



Test Charts



Light Booths

★ CONTACT US



web: www.3nh.com



Email: 3nh@3nh.com




Tel: 0086-020-82880288



Add: 6-8th floors, Building B33, Low Carbon Headquarters Park,
Xincheng Road No.400, Zengcheng District, Guangzhou,
Guangdong Province, China

Application


The spectrophotometer ST50 adopts a single customized measurement aperture, with accurate measurement data and stable performance. It is used for accurate color measurement and quality control in plastic electronics, paint ink, textile and garment printing, printing, ceramics and other industries.

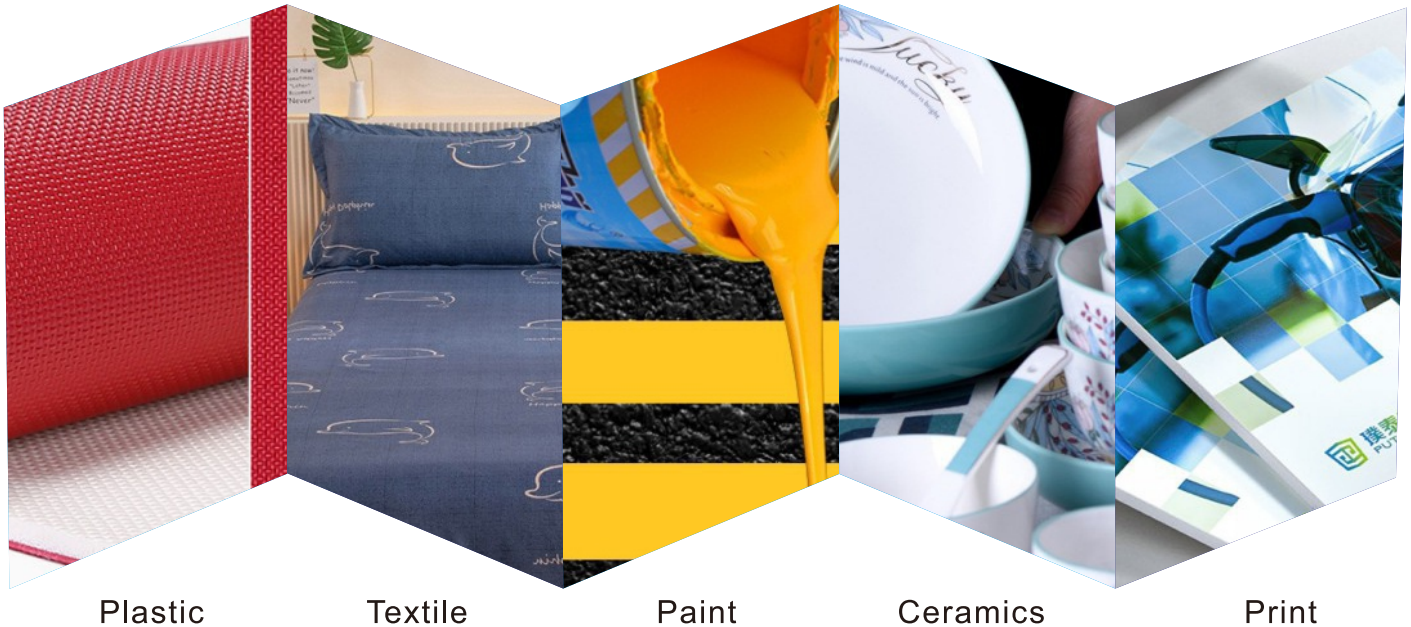

Features


1. Large area photodiode array (20 groups of dual columns) sensors

Larger area double 20 array sensor, strong light will not be saturated, weak light sensitivity is higher and wider spectral response range, to ensure the instrument measurement speed, accuracy, stability and consistency, independent core technology, and international standards
The same platform is fully compatible.

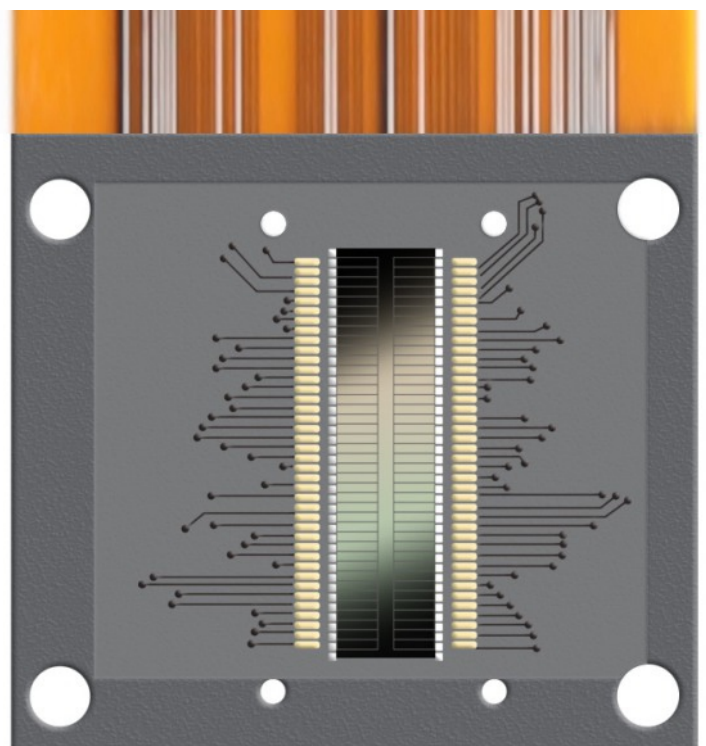


2. Adopt the international D/8 structure, support SCI+SCE simultaneous fast measurement

Spectrophotometer ST50 adopts D/8 illumination observation conditions and SCI/SCE (including specular reflection/exclusive specular reflection) synthesis technology, which is widely applicable in the world, and supports SCI+SCE simultaneous rapid measurement, and the test time is about 1.5 seconds.

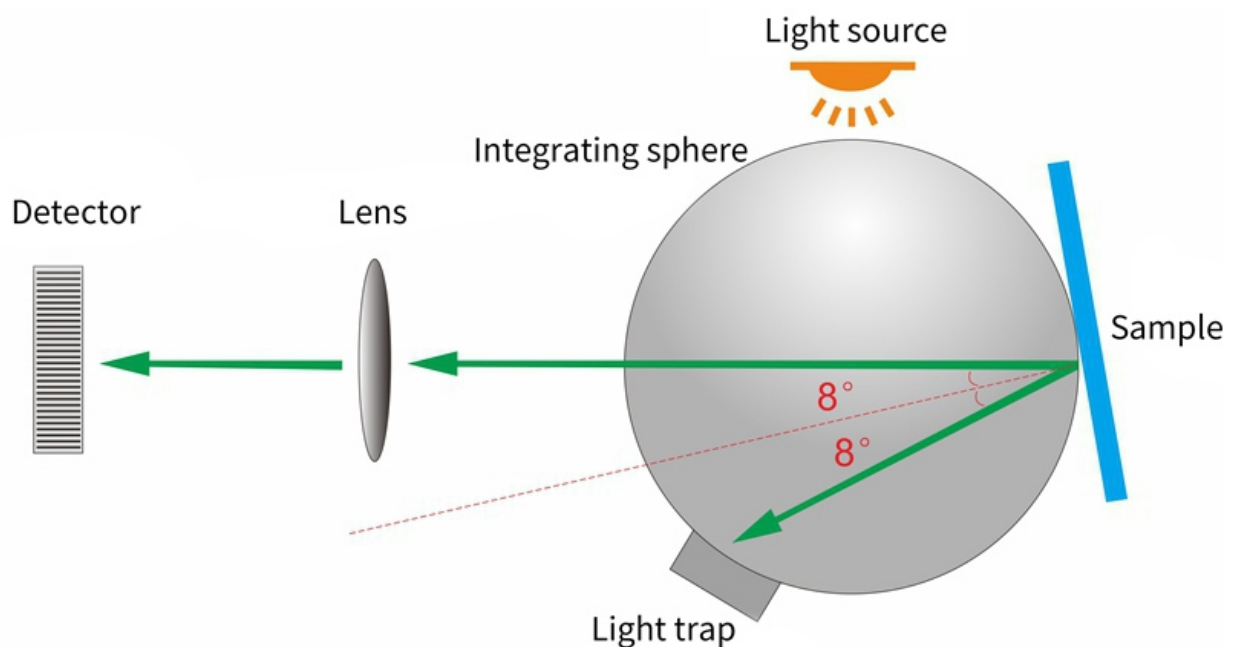

3. Combined full spectrum LED light source and UV light source

The use of 400-700nm full-spectrum LED light source ensures sufficient spectral distribution in the visible light range, avoids the lack of spectrum in specific bands, strong light will not be saturated, weak light is more sensitive, and fluorescent samples can also be easily measured.

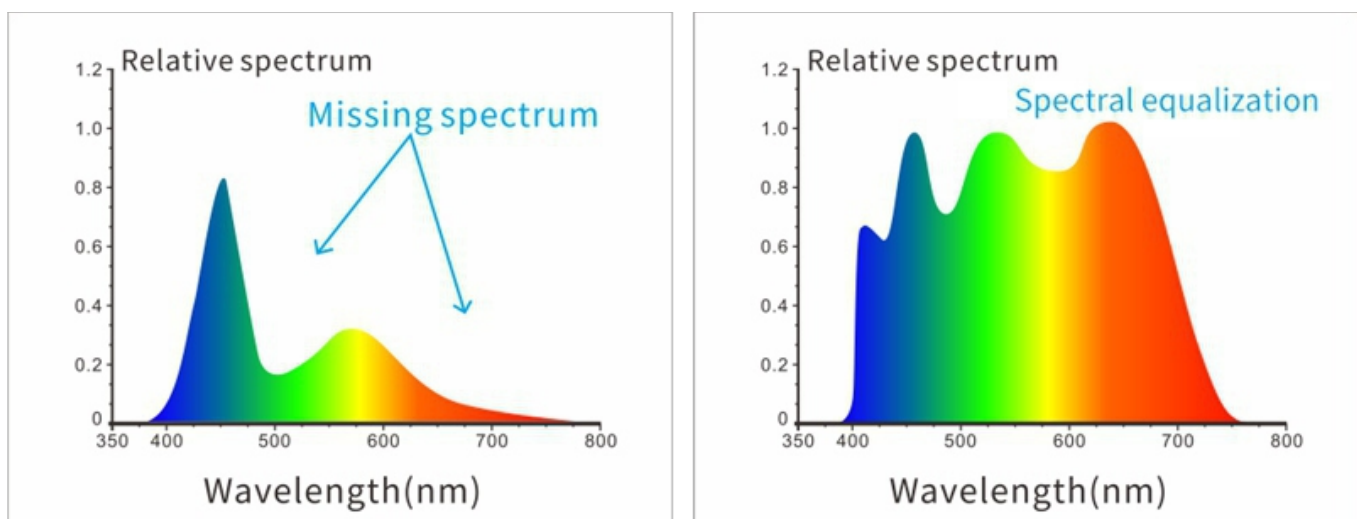

4. The camera framing and positioning can clearly observe the measured area

The spectrophotometer ST50 has a built-in camera for viewing and positioning. Through the real-time viewing of the camera, it can accurately determine whether the measured part of the object is the center of the target, which improves the measurement efficiency and accuracy.



6. Place the base with peace of mind to ensure that the whiteboard is not dirty




5. Non-contact automatic calibration, professional imported whiteboard, more wear-resistant, dirt-resistant and stable.



7. Provides 8 kinds of color measurement spaces and 41 kinds of observation light sources, and the light source can be customized (partly realized by the host computer/APP), which can meet the special measurement requirements under different measurement conditions.



SUPPORT  COLOR SPACES

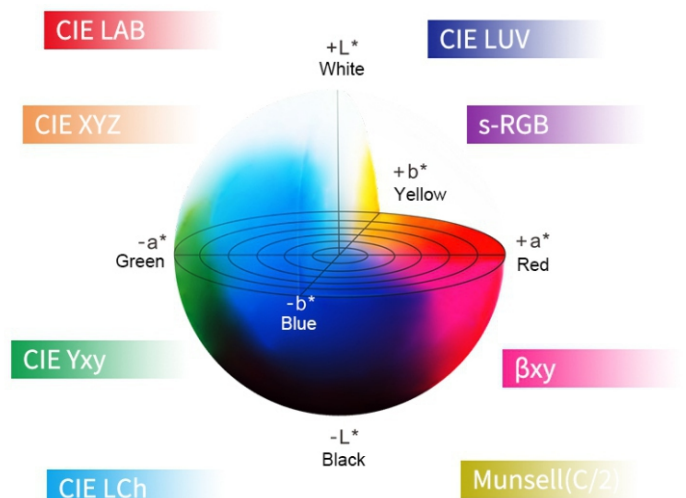

8. Rich chromaticity indicators

In addition to the commonly used color measurement indicators, the spectrophotometer ST50 also provides spectral reflectance, WI (ASTME313, CIE/ISO, AATCC, Hunter, TaubeBergerStensby), YI (ASTMD1925, ASTM313), metamerism index Mt, staining Fastness, color fastness, strength (dye strength, tinting strength), opacity, 8 degrees gloss, 555 shade classification, blackness (My, dM), color density CMYK (A, T, E, M), Tint, color density, Munsell (some functions are realized by the host computer) chromaticity index.

9. Support Huawei Harmony OS, Android, IOS, Wechat applets, Windows programs

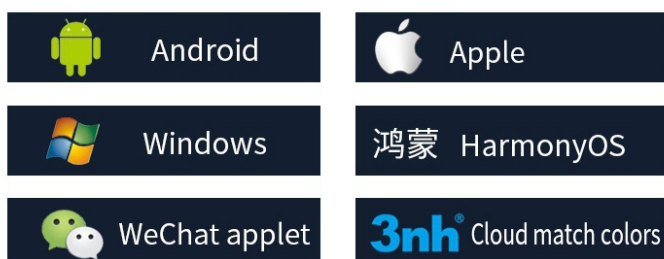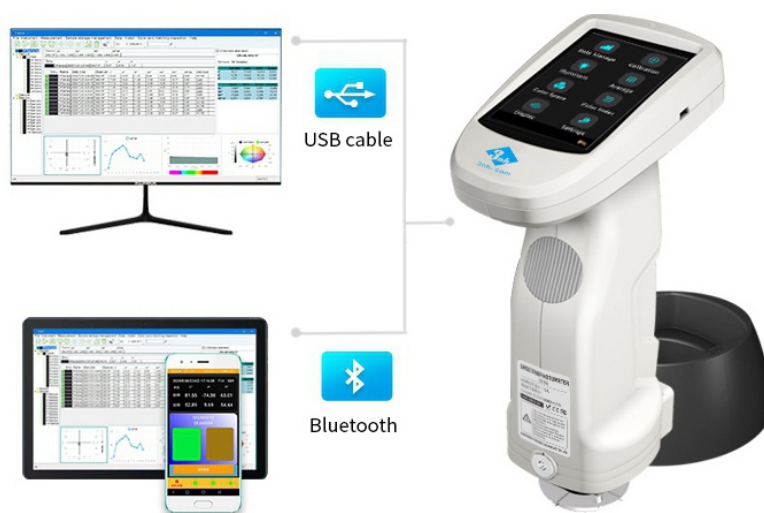

Optional accessories


Micro printer: easy to carry, without computer can continuously print out the measurement of various parameters, easy to save.



Place the base: easy to place quickly, take the machine to use, prevent dust from entering, save space, the base is stable, will not fall.



Multifunctional test components: can be used to test liquid reagents, sauces (such as ketchup, paint), powders (such as coffee), color masterbatches, etc.



Powder test box: Easy to use, focusing on powdered target measurement.



Product parameters

Model	ST50 spectrophotometer
Optical Geometry	D/8 (diffused illumination, 8-degree viewing angle)
	SCI (specular component included)/SCE (specular component excluded) ;excluded UV light source
	Conforms to CIE No.15,GB/T 3978,GB 2893,GB/T 18833, ISO7724-1, ASTM E1164, DIN5033 Teil7
Integrating Sphere Size	Φ40mm
Light Source	Combined full spectrum LED light source
Spectrophotometric Mode	Flat Grating
Sensor	Silicon photodiode array (double row 20 groups)
Wavelength Range	400~700nm
Wavelength Interval	10nm
Measured Reflectance	0-200%
Measuring Aperture	One aperture: 8mm or 4mm optional
Specular Component	SCI&SCE
Color Space	CIE LAB,XYZ,Yxy,LCh,CIE LUV,s-RGB,βxy,Munsell(C/2)
Color Difference Formula	$\Delta E^*ab, \Delta E^*uv, \Delta E^*94, \Delta E^*cmc(2:1), \Delta E^*cmc(1:1), \Delta E^*00$
Other Colorimetric Index	Spectral reflectance,WI(ASTM E313,CIE/ISO, AATCC, Hunter, TaubeBergerStensby),YI(ASTM D1925,ASTM 313), Metamerism Index MI, Staining Fastness, Color Fastness, Color Strength, Opacity 8° Glossiness,555 tone classification, Carbon (My,dM), color density CMYK(A,T,E,M), Tint, Munsel chroma index (part of the function is realized)
Observer Angle	2°/10°
Illuminant	D65,A,C,D50,D55,D75,F1,F2(CWF),F3,F4,F5,F6,F7(DLF),F8,F9,F10(TPL5),F 11(TL84),F12(TL83/U30),B,U35,NBF, ID50,ID65,LED-B1,LED-B2,LED- B3,LED-B4,LED-B5,LED-BH1,LED-RGB1,LED-V1,LED-V2,LED-C2,LED- C3,LED-C5, able to customized light source (total 41 kinds of light source, Partially realize through the PC software /APP software)
Displayed Data	Spectrogram/Values, Samples Chromaticity Values, Color Difference Values/Graph, PASS/FAIL Result, Color simulation, Color Offset
Measuring Time	About 1.5s
Repeatability	Chromaticity value: MAV/SCI, within ΔE^*ab 0.03 (When a white calibration plate is measured 30 times at 5 second intervals after white calibration)
	Spectral reflectance: MAV/SCI, Standard deviation within 0.1% (400 nm to 700 nm: within 0.2%)
Inter-instrument Error	MAV/SCI, Within ΔE^*ab 0.2 (Average for 12 BCRA Series II color tiles)
Display Resolution	0.01
Measurement Mode	Single Measurement, Average Measurement(2-99times)
Locating Method	Camera Locating,stabilizer cross position
Dimension	L*W*H=129X76X217mm
Weight	Approx 600g
Battery	Li-ion battery, 8800 measurements within 8 hours
Illuminant Life Span	10 years, more than 1.5 million times measurements
Displayed Data	3.5-inch TFT color LCD, Capacitive Touch Screen
Data Port	USB, Bluetooth ®
Data Storage	Standard 1000 Pcs, Sample 20000 Pcs, APP/PC mass storage
Software Support	Andriod,IOS,Windows,Harmony OS,Wechat applets
Language	Simplified Chinese, English, traditional Chinese
Standard Accessory	Power Adapter, USB cable, User Guide, PC Software(Download from office website), White and Black Calibration Cavity, Protective Cover, Wrist strap, Aperture (8mm or 4mm optional)
Optional Accessory	Micro Printer, Powder Test Box , Multifunctional Test Assembly , Placing Base